
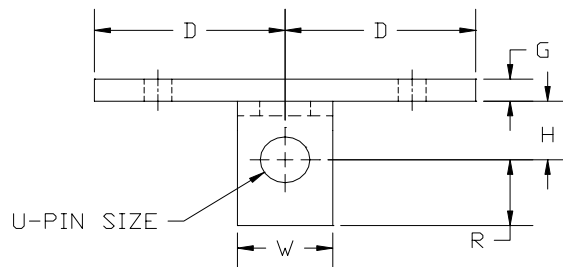
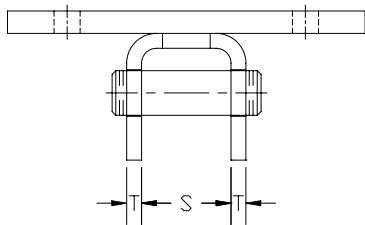
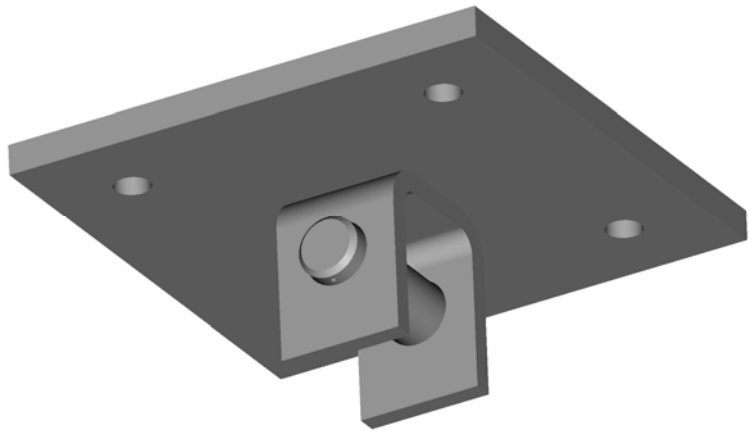


Concrete Attachments

Concrete Pin Lug

Part # 101

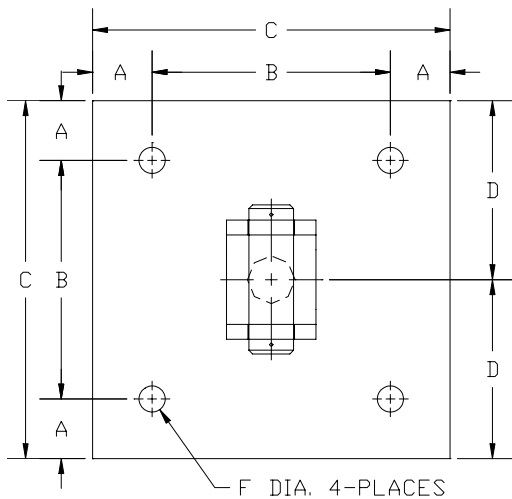

SIZE RANGE: For use with rod sizes 3/8" to 2" inches.

MATERIAL TYPES: Carbon Steel

FINISH: Black, Galvanized, or coated to customer specifications

APPLICATIONS: Structural attachment to concrete ceiling where flexibility is desired. Concrete Pin Lug is normally used in conjunction with Part #295 weldless eye nut (right hand thread) or Part #220 hanger rod eye nut (right hand thread).

ORDERING: Specify rod size, Part number, name, and finish.

Loads (lbs) • Weights (lbs) • Dimensions (inches)

Rod Size	*Maximum Load	Weight	A	B	C	D	F	G	H	R	T	U	W
3/8	730	11.8	1	8	10	5	9/16	3/8	2	7/8	1/4	1/2	2
1/2	1350	11.9	1	8	10	5	9/16	3/8	2	7/8	1/4	5/8	2
5/8	2160	15.7	1	8	10	5	9/16	1/2	2	7/8	1/4	3/4	2
3/4	3230	16.9	1	8	10	5	11/16	1/2	2	1 1/8	3/8	7/8	2 1/2
7/8	4480	18.1	1	8	10	5	11/16	1/2	3	1 1/4	3/8	1	2 1/2
1	5900	36.9	2	8	12	6	13/16	3/4	3	1 1/2	1/2	1 1/8	3
1 1/4	9500	40.9	2	8	12	6	15/16	3/4	3	2	5/8	1 3/8	4
1 1/2	13800	59.8	2	8	12	6	1 1/8	1	4	2 1/2	3/4	1 5/8	5
1 3/4	18600	93.6	2	10	14	7	1 3/8	1 1/4	5	2 3/4	1/2	1 7/8	5

*Based on allowable stresses shown in the ASME Code for Pressure Piping.